


Space requirements (unit: mm)

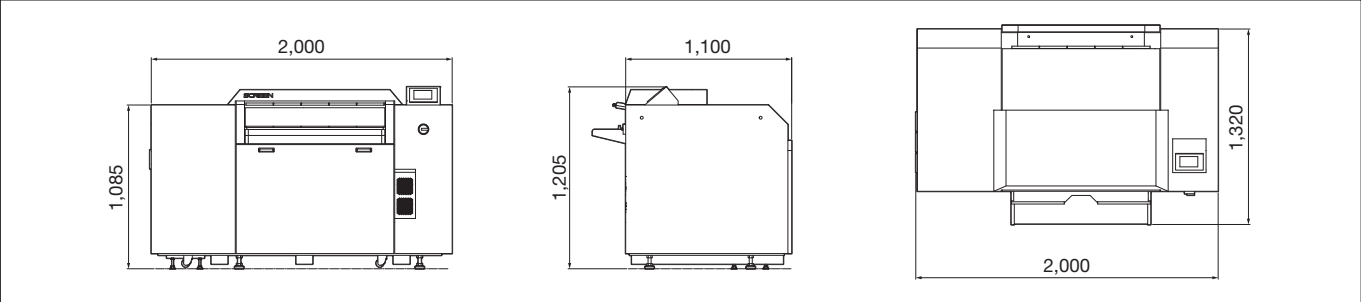

PlateRite 4600Z/S/E specifications

Product name	PlateRite 4600N-Z	PlateRite 4600N-S	PlateRite 4600N-E
Recording system	External drum		
Light source	64-channel fiber laser diodes	32-channel fiber laser diodes	16-channel fiber laser diodes
Plate sizes	Maximum 830 × 680 mm (32.6" × 26.8"); Minimum 324 × 330 mm (12.8" × 13") (Compatible with a minimum plate size of 270 × 278 mm [10.7" × 11"] or 324 × 278 mm [12.8" × 11"] with option A or option B respectively)*1		
Exposure size	830 × 656 mm (32.6" × 25.9") (12 mm [0.5"] leading/trailing edge clamps), compatible with a maximum exposure size of 830 × 664 mm (32.6" × 26.2") (8 mm [0.4"] leading/trailing edge clamps) as an option*1		
Media	Thermal aluminum plate		
Media thickness	0.15 to 0.3 mm (5.9 to 11.8 mil)		
Resolutions	1,200*2 /2,400/2,438/2,540 dpi		
Repeatability	±5 microns*3		
Productivity	33 plates/hr at 2,400 dpi (724 × 615 mm / 28.5" × 24.2")*4	21 plates/hr at 2,400 dpi (724 × 615 mm / 28.5" × 24.2")*4	11 plates/hr at 2,400 dpi (724 × 615 mm / 28.5" × 24.2")*4
Interface	Gigabit Ethernet		
Plate transport	Manual supply / manual discharge, manual supply / automatic discharge, fully automatic		
Punch systems (option)	SCREEN, Heidelberg, Heidelberg W, Protocol, Komori and others		
Dimensions (W × D × H)	2,000 × 1,320 × 1,205 mm (78.8" × 52.0" × 47.5") (including feed tray)		
Weight	800 kg (1,764 lb) (including feed tray)	785 kg (1,731 lb) (including feed tray)	
Power requirements	Single phase 200 to 240 V, 15 A, 3.6 kW (including autoloader)		
Environment	Recommended: 21 to 25°C (69.8 to 77°F) Required: 18 to 26°C (64.4 to 78.8°F) Relative humidity: 40 to 70% (no condensation)		
Required option	Any one of feed tray, SA-L4600, MA-L4600		
Options	SA-L4600 single-cassette autoloader, MA-L4600 multi-cassette autoloader, plate transport system (built-in bridge), feed tray, signal tower, air filter unit (AF-190)		

*1. Some limitations apply. Please contact your nearest SCREEN sales representative for further details.
*2. 1,200 dpi uses 2,400 dpi double dots.
*3. Over four consecutive exposures on one plate at 35°C (95°F) and 60% relative humidity.
*4. Productivity may vary depending upon media sensitivity.

Autoloader specifications (SA-L4600 single-cassette autoloader, MA-L4600 multi-cassette autoloader)


Product name	SA-L4600	MA-L4600
Plate transport	Fully-automatic (automatic interleaf paper removal)	
Total cassette capacity	100 plates	300 plates
No. of cassettes	1	3
Dimensions (W × D × H)	1,395 × 1,720 × 1,033 mm (55" × 67.8" × 40.7")	2,590 × 1,720 × 1,033 mm (102" × 67.8" × 40.7")
Weight	Approx. 340 kg (748 lb)	Approx. 765 kg (1,683 lb)
Power requirements	Supplied by main unit	
Environment	Recommended: 21 to 25°C (69.8 to 77°F) Required: 18 to 26°C (64.4 to 78.8°F) Relative humidity: 40 to 70% (no condensation)	
Standard accessories	Interleaf paper disposal box, carrier-type cassette	Interleaf paper disposal box
Options	Additional plate cassette with carrier, PT-R4600N connection kit	PT-R4600N connection kit

Option is required when using plates of size from 270 × 330 to 304 × 370 mm or from 830 × 660 to 830 × 680 mm.

SCREEN Graphic Solutions Co., Ltd.

HEAD OFFICE
• Tenjin Kita-machi 1-1, Teranouchi-agaru 4-chome, Horikawa-dori, Kamigyo-ku, Kyoto 602-8585, Japan / Tel: +81-75-414-7610
SCREEN GP Americas, LLC
• 150 Innovation Drive • Ste A, Elk Grove Village, IL 60007, U.S.A. / Tel: +1-847-870-7400 / Fax: +1-847-870-0149 www.screenamericas.com
SCREEN GP Europe B.V.
• Bouwerij 46, 1185XX Amstelveen, The Netherlands / Tel: +31-20-456-78-00 www.screen europe.com
U.K. office / Tel: +44-1582-72-5400
SCREEN Holdings Singapore PTE. Ltd.
• 29, Kaki Bukit View, #02-00, Kaki Bukit Techpark II, Singapore 415963 / Tel: +65-6845-3288 / Fax: +65-6741-2168 www.screen sp.com.sg
SCREEN GP China Co., Ltd.
• Room 2001 - 2003, 20/F Cable TV Tower 9 Hoi Shing Road Tsuen Wan, N.T. Hong Kong / Tel: +852-2953-0038 / Fax: +852-2755-8683 www.screen china.com
Shanghai office / Tel: +86-21-3126-5122 / Fax: +86-21-5218-2199
Beijing office / Tel: +86-10-6708-9271 / Fax: +86-10-6708-9395
Guangzhou office / Tel: +86-20-3887-9650 / Fax: +86-20-3887-9653
SCREEN GP Taiwan Co., Ltd.
• 4th Floor, No. 126-1, Min-tsu West Road, Taipei, Taiwan R.O.C. / Tel: +886-2-2586-2711 / Fax: +886-2-2591-4367
SCREEN HD Korea Co., Ltd.
• K-TOWER 11F, 88, Ilje-ro, Minan-gu, Anyang-si, Gyeonggi-do, 13901, Korea / Tel: +82-2-727-0860 / Fax: +82-2-727-0876 www.screen-korea.com
SCREEN GP Australia PTY., Ltd.
• Suite 15A, 2 Eden Park Drive, Macquarie Park, NSW 2113, Australia / Tel: +61-2-9016-3400 / Fax: +61-2-9016-3425 www.screen aust.com.au

Internet web site : www.screen.co.jp/ga
www.screenamericas.com
www.screen europe.com



We reserve the right to alter product design and specifications without prior notice.

No.205-173E V2-E SCI 05-21

SCREEN



PlateRite 4600N-Z/S/E

Thermal Plate Recorder



Advanced 4-page thermal CtP systems with innovative optical technology deliver outstanding reliability

PlateRite 4600N-Z/S/E

SCREEN's new PlateRite 4600N-Z, S and E CtP systems enable consistent production of high-quality printing plates. The high-end PlateRite 4600N-Z delivers an impressive throughput of up to 33 plates per hour.

The exposure heads used in the PlateRite 4600N series have been enhanced with the addition of new fiber laser diodes. These diodes enable the reproduction of sharper halftone dots, significantly improving print quality.

All systems can also be equipped with an option that supports plate sizes smaller than the standard settings (270 x 278 mm).



Automation Autoloader streamlines production

An autoloader system can be installed to automate all processes from plate loading through exposure, transport and developing to discharge. An autoloader supports extended periods of continuous operation. Two types of systems are available. While the SA-L4600 single-cassette autoloader accepts one cassette containing up to 100 plates of the same size, the MA-L4600 multi-cassette autoloader can handle three separate cassettes with up to 100 plates each.



MA-L4600 multi-cassette autoloader
Accepts three cassettes containing up to 100 plates each (total of 300 plates)

High quality Proprietary technologies ensure stable exposure

Accurate reproduction of halftone dots with exposure heads

To ensure more stable exposure, the light source is equipped with the same proven fiber laser diodes used in the PlateRite 8600 series. The resulting changes in the laser beam produce more accurate vertical and horizontal lines, enabling sharper reproduction of halftone dots. This has led to a major increase in overall print quality.

Stable drum rotation even at high speeds


Locating the light source as close as possible to the plate has enabled even sharper imaging. The use of proprietary clamp technology and an auto-balance system also makes it possible to perform stable, high-speed exposure regardless of the plate size.

Auto-balance system

The operator simply selects the appropriate pre-registered plate size and type during setup, and the PlateRite 4600N automatically makes the necessary adjustments to ensure perfect drum balance.



Comparison of exposure results on thermal CtP plates

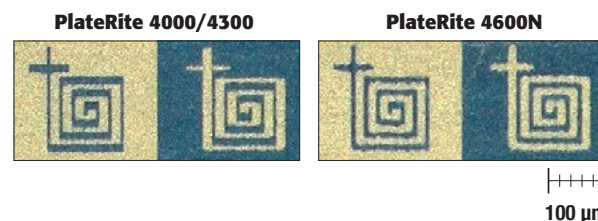

More efficient setup for printer loading

Punch system (optional)


When the punch system (up to six blocks) are used, the imaged plates can be loaded directly onto the press after output. The use of printing press punch blocks during plate output eliminates the need for manual punching later on in the workflow, ensures excellent registration accuracy, and creates the foundation for perfect results on press.

Wider range of supported plate sizes

Improved support for small size plates (optional)

The newly available small size option supports minimum plate size of 270 x 278 mm (10.7" x 11").


Some limitations apply with this option. Please contact your nearest SCREEN sales representative for further details.



Constant checking of CtP status from a remote location

Remote monitoring system

Remote monitoring allows users to keep an eye on CtP operating conditions and output history from a remote location, using a web browser or e-mail. E-mails can also be sent automatically to the service center and entered into a database for use in maintenance, repairs, and periodic inspections, ensuring that the CtP recorder is in optimal operating condition at all times*.

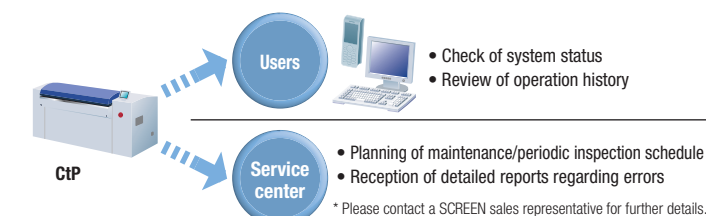


Advanced EQUIOS workflow system

Linking the PlateRite 4600N series with EQUIOS enables non-stop automatic processing with minimal errors, waste or downtime. This simplified operation improves the efficiency of CtP processing and helps the entire system to achieve the maximum possible productivity.

Extremely user-friendly continuous operation

- In-RIP imposition allows the creation of highly efficient workflows.
- The availability of CIP4-compatible fold catalogs improves the speed and reliability of imposition design.

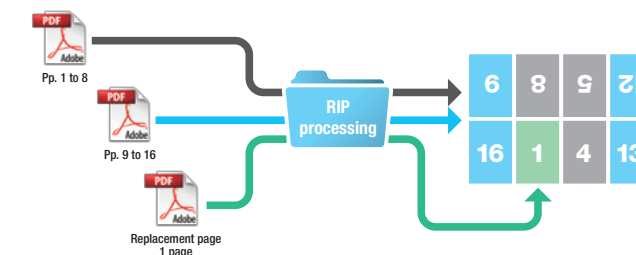

Latest Adobe PDF print engine

- Comprehensive advance verification ensures reliable output results.
- Use of the latest engine enables extremely rapid computation.

